


Durchgangsventil mit gewinde / mit verbindung für anschlüsse DIN 3436


Eingang: anschluss G 1" 3/8 - Abgang: anschluss G 1" 3/8



Abschließbarer Hebel
Druckmessstelle G1/8"
Befestigungsbügel aus Stahl

HTB 650 °C für 30 min (DIN EN331 C0.1)



- HTB 650 °C für 30 min (DIN EN331 C5) - TAE

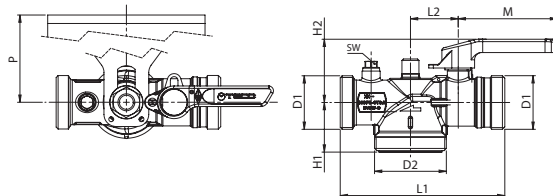



Code	DN	FIREBAG TAE	GST® GS m³/h	D1	D2	H1	H2	L1	L2	M	SW	P	Verp.
G61306L100	25			G1" 3/8	G2"	41	52	136	40	82	10	100+120	5
G62306L100	25	•		G1" 3/8	G2"	41	52	162	40	82	10	100+120	5
G63306L200	25		V _{GAS} =2.5	G1" 3/8	G2"	41	52	162	40	82	10	100+120	5
G63306L300	25		V _{GAS} =4.0	G1" 3/8	G2"	41	52	162	40	82	10	100+120	5
G63306L400	25		V _{GAS} =6.0	G1" 3/8	G2"	41	52	162	40	82	10	100+120	5

BETRIEB UND TECHNOLOGIEN

G6 eckversion

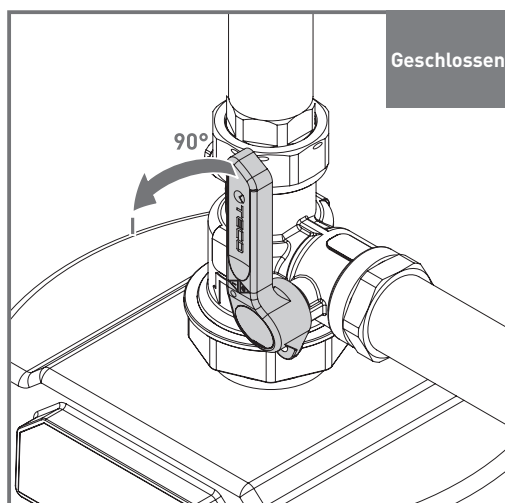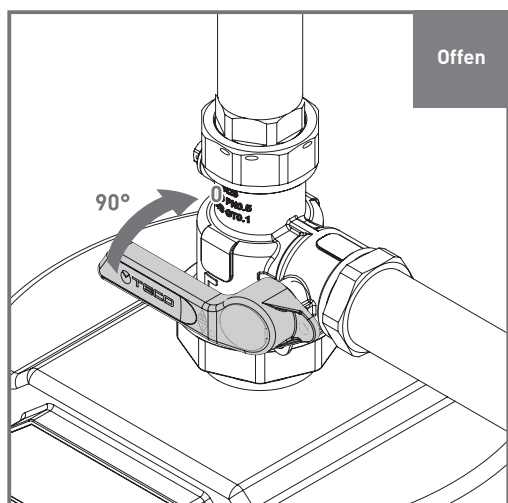

G6 gerade version

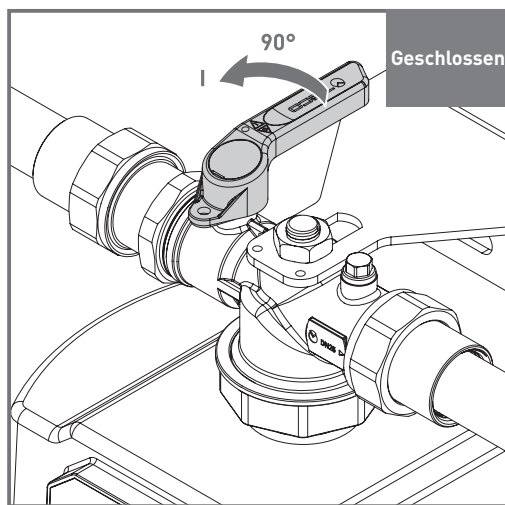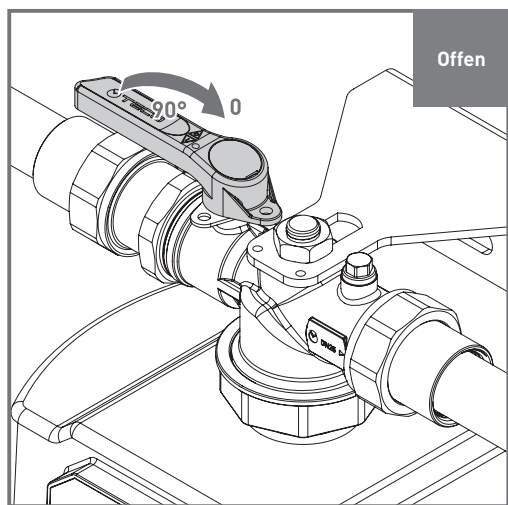

TECO Srl
Via Sandro Pertini, 39/41 - Zona industriale Noccole, 25050 Provaglio d'Iseo (BS)

+39 030 6850510 | +39 030 6850555
info@tecosrl.it | www.tecosrl.it

