



Gomito misto - filetto maschio
Elbow adaptor 90° with male thread
Übergangswinkel 90° A.G.

Code	d - R	L	H	Z		MOQ
G31PC	15-R $\frac{1}{2}$	54	37	33	108	80
G31PD	18-R $\frac{1}{2}$	54	37	33	115	50
G31QE	22-R $\frac{3}{4}$	58	39	35	170	50
G31RF	28-R1	65	44	41	294	50
G31SG	35-R1 $\frac{1}{4}$	73	49	46	468	30




Gomito misto - filetto femmina
Elbow adaptor 90° with female thread
Übergangswinkel 90° I.G.

Part No.	d - Rp	L	L1	Z	Z1		MOQ
G30PC	15-Rp $\frac{1}{2}$	54	37	33	25	128	80
G30PD	18-Rp $\frac{1}{2}$	54	39	33	27	141	60
G30QE	22-Rp $\frac{3}{4}$	58	46	35	33	184	50
G30RF	28-Rp1	65	54	41	38	408	50
G30SG	35-Rp1 $\frac{1}{4}$	73	63	46	46	589	30

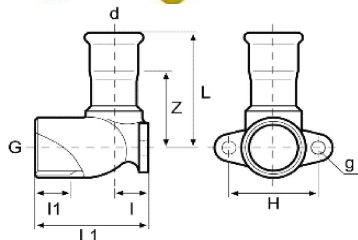

Gomito misto con flangia
90° female elbow adaptor with wall plate
Deckenwinkel 90° I.G.

Code	d - G (ISO 228)	L	L1	Z	I	I1	H	g		MOQ
G32PC	15-G $\frac{1}{2}$	47	43	26	13	13	34	5	112	80
G32PD	18-G $\frac{1}{2}$	47	43	26	13	13	34	5	107	60
G32QE	22-G $\frac{3}{4}$	52	51	29	17	15	40	6	163	60



Manicotto misto - filetto maschio
Adaptor with male thread
Übergangsmuffe A.G.

Code	d - R	L	Z		MOQ
G81PC	15-R $\frac{1}{2}$	53	32	58	100
G81PD	18-R $\frac{1}{2}$	54	33	59	100
G81PE	22-R $\frac{1}{2}$	68	45	76	100
G81QE	22-R $\frac{3}{4}$	58	35	79	100
G81RE	22-R1	72	49	130	100
G81QF	28-R $\frac{3}{4}$	74	50	102	100
G81RF	28-R1	64	40	130	100
G81RG	35-R1	83	56	163	50
G81SG	35-R1 $\frac{1}{4}$	71	44	190	50
G81TG	35-R1 $\frac{1}{2}$	84	57	223	30
G81TH	42-R1 $\frac{1}{2}$	76	44	224	20
G81VJ	54-R2	87	50	405	20
G81XK	76,1-R 2 $\frac{1}{2}$	125	70	889	5
G81YL	88,9-R 3	140	77	1,272	5